

MIXERS WITH SELF-LUBRICATED TELESCOPIC COLUMN



A.C. (manual)
A.C.A. (automático)
A.C.L. (manual with timer-controlled washing siphon funcionamiento manual con sifón de lavado a tiempo)
A.C.A.L. (automatic, with Flushing automático con lavado)

This type of mixer is suitable for batches of neutral or colour printing pastes.

It features a patented free impeller for colour homogenizing and distemping. Available in the 3 to 2000 kg capacity range, motor rating 1 to 45 HP, 1400/2800 rpm or inverter-controlled.

Models:

A.C. - manual motor/impeller upstroke-downstroke, with pneumatic piston.
A.C.A. - magnetic-field controlled washing siphon.
A.C.L. - manual with timer-controlled washing siphon
A.C.A.L. - on board, adjustable with individual processing timer and flushing timer.

NB: Optional EXPLOSION-PROOF version for solvent - based resins.




A.C.R. Manual
A.C.R./A
A.C.R./V

Fabricado con las mismas características del preparador **ORBITALMIXER P.99**, con contenedor giratorio intercambiable extraíble de diferentes diámetros - giratorio al costado y no al centro - motor: giratorio de 2 velocidades. Subida y bajada motor/ girotorio manual con pistón neumático. Automático con timer. Con inverter

Construcción

De 100Kg. a 2.000 para la producción de grandes cantidades - látex - pastas neutras o color - resinas para untaduras - compound elaboraciones con polvos-reutilización pasta color para coberturas 100% - revoques, etc.

mod.	Capacità Kg	A	A+B	C	D	E+/L	Peso Netto Kg
AC -AC A/L	Capacity Kg						Net weight Kg
	Capacité Kg						Poids net Kg
	Capacidad Kg						Peso neto Kg
HP 2,5/3,5	30/10	1100	1600	90	1000	500/400	100
HP 3,5/4,5	60/20	1100	2000	90	1100	500/400	120
HP 4,5/6	100/20	1200	2050	110	1150	500/400	130
HP 9/11	200/20	1400	2500	110	1200	500/500	180
HP 12/15	400/50	1600	2600	130	1250	500/500	230

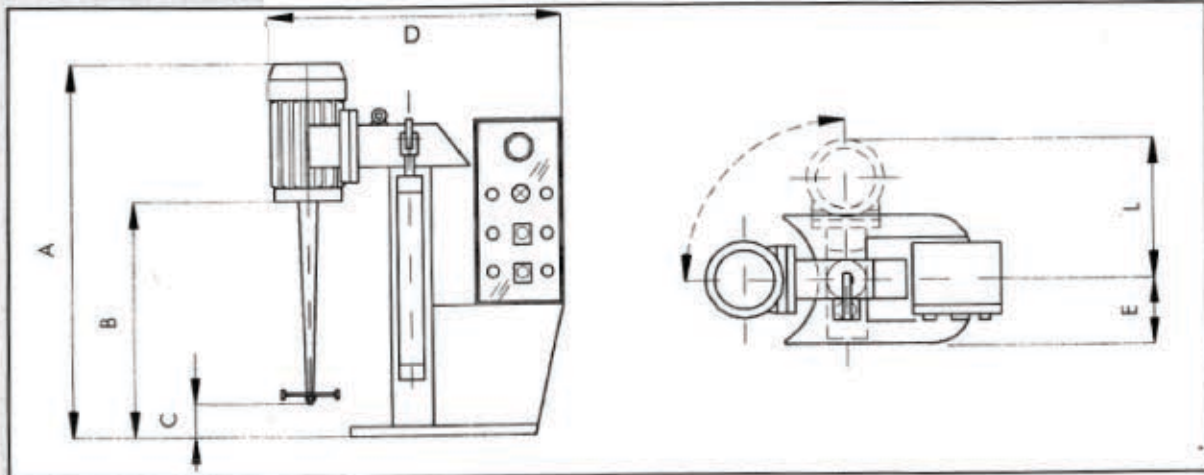

Bombe de filtro P.F.C.

Versión: neumática - portátil - fija - con ruedas.
Filtrado a tierra; pasta neutra o coloreada con capacidad regulable de 0 a 20000 litros/hora con grupo de filtrado.
Comodidad de uso y velocidad en el lavado (ANTIDFLAGRANTE)

P.F.C. Filter pump

Versions : air-operated, portable, stationary, trolley-mounted.
Earth filtering, for neutral or coloured pastes, adjustable over a 0-to-20,000 liters/hour range, with filtering unit.
Practical to use and fast-flushing (EXPLOSION-PROOF).
NB: Adapted to any automatic-feed printing or coating machine.